


Yottacontrol A-3290 WiFi Transmitter Quick Start

The Yottacontrol A-3290 WiFi Transmitter had a two-way communication to communicate with the Modbus TCP/IP



Before the regular use, must finish the related setup process. And prepare below items to finish the setup.

1. Download and install the A-3290 connect cable **CAB-89** driver from below web link.
<http://www.yottacontrol.com/download/CAB89.rar>
2. Prepare A-3290 and CAB-89 cable.
3. Open the A-3290 rear cover and use the CAB-89 to link the A-3290 and the PC. (Remove the battery)

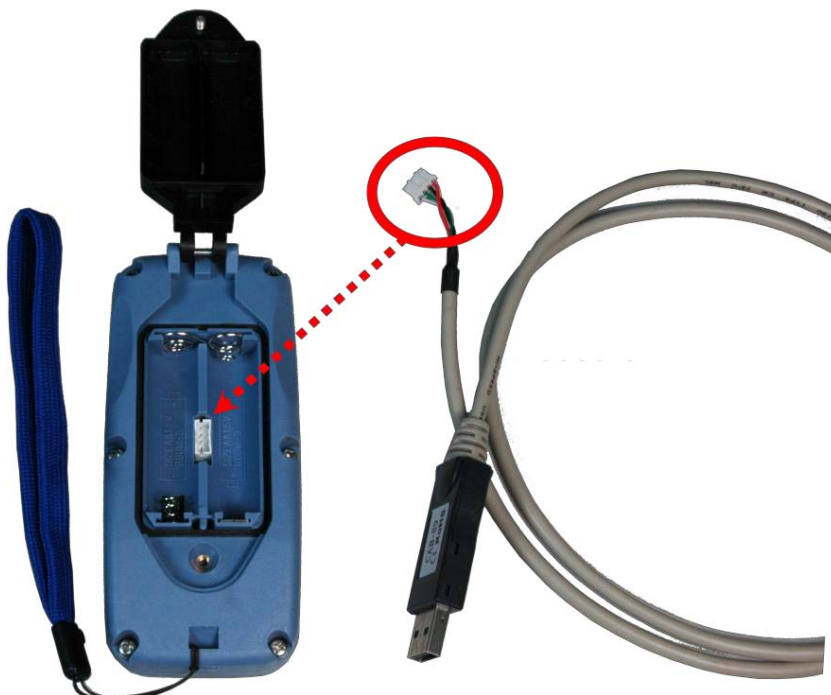

You can set the WiFi parameters in the following figure.

LED Indication

Green & Red spark: When power on, the A-3288 need to press the password. When finish, press the START.

Green: Success to connect.

Red: disconnect.

SSID

Password

Tx Power

MAC Address

Device ID

LED

On Time (ms)

Off Time (ms)

Sleep Mode

WiFi Key Password

IP Address

Port

Modbus Start Address